

### EURO-QUICK®

galvanised

#### Field of application

- Suitable for fixings in housing and industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

#### Advantages


- With highly elastic insert
- Captive fastening screws

- High rigidity thanks to reinforcing rib
- Usable temperature range from -50 °C to +110 °C
- Fastening screws with combination cross-head
- Safe handling thanks to rounded flange
- Clip-over edges and the guide rib of the pipe clamp insert ensures a secure hold and prevents it from being pushed out



#### Features

Size	Max. recommended load [N]
12–15 to 25–30 mm	853
32–37 to 59–63 mm	880
63.5–70 to 75–78 mm	1,355
78–84 to 108–115 mm	2,044
114–118 to 212–222 mm	2,700

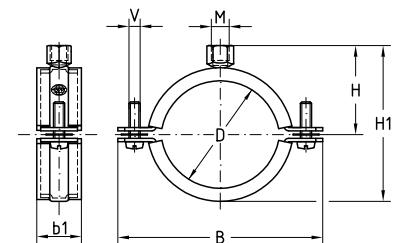

Connecting thread	For pipe outer Ø		Part no.	Sales unit	Pack unit	Dimensions [mm]						
	[mm]	[inches]				B	b1	H	H1	V		
M8	12–15	¼	132122	50	pieces	48.5	21	28.5	40	M6		
	15–19	⅜	132123			30.5		44				
	20–25	½	132124			33.5		50				
	25–30	¾	132125			35.5		54				
	32–37	1	132126			39.5		62				
	40–45	1¼	132127			43.5		70				
	47–53	1½	132128			47.5		78				
	54–58		132129			50.5		84				
	59–63	2	132130			52.5		88				
M8/M10	63–70		132131			25		103.0	23	56.0	95	M8
	72–78	2½	132132					60.0		103		
	78–86		132133					64.0		111		
	87–93	3	132134					67.5		118		
	98–104		132135					73.0		129		
	108–115	4	132136					79.0		141		
	114–118		132137					81.0	145			
	124–130		132138					87.0	157			
	132–137		132139					91.0	165			
	137–142	5	132140	96.0	175							
	159–163		132141	107.0	197							
	159–163	6	132142	109.5	202							
	193–203		139166	128.0	239							
	212–222	8	132143	135.0	257							